


Model

FS108D

8-Port 10/100 Mbps
Desktop Switch

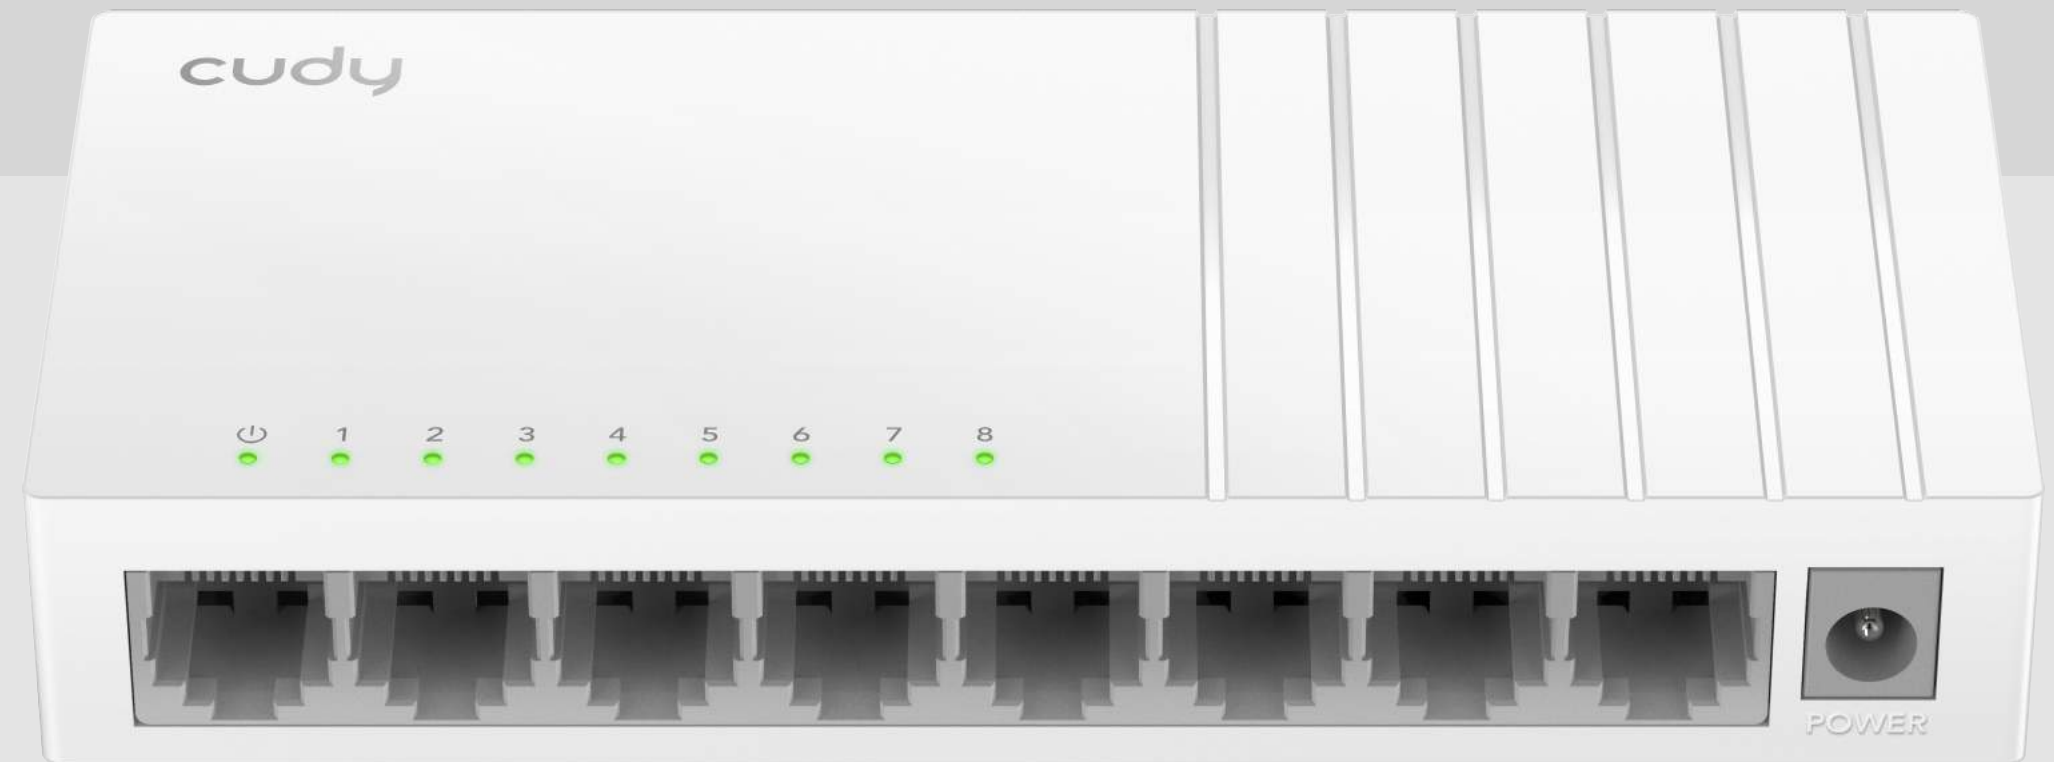

Datasheet



Features

- 8× 10/100 Mbps Ethernet Ports
- Reliable forwarding with 570 Kbit packet buffer
- Super power-efficient with max 0.75W / idle 0.4W
- Non-blocking switching architecture
- Desktop and wall-mounting

Specifications

Model	FS108D
Standards	IEEE 802.3i/u
Ethernet	8× 10/100 Mbps Ports (Auto-Negotiation, Auto-MDI/MDIX)
Network Media	10BASE-T: UTP Cat 3 or above cable (≤100 m)
	100BASE-TX: UTP Cat 5 or above cable (≤100 m)
Transfer Method	Store-and-Forward
MAC Address Table	2048
Switching Capacity	1.6 Gbps
Packet Forwarding Rate	1.1904 Mbps
Packet Buffer	570 Kbit
Power Saving	Saves power consumption when ports are idle
Power Consumption	Max 0.75W, Idle 0.4W
Power	DC 5 V / 0.55 A
Dimensions (W×D×H)	151×75×63 mm (5.94×2.95×2.48 inches)
Environment	Operating Temperature: 0°C~40°C
	Storage Temperature: -40°C~75°C
	Operating Humidity: 0%~100% non-condensing
	Storage humidity: 5%~95% non-condensing
Package Content	Switch, Power Adapter, Installation Guide