




Model: FS108D


8-Port 10/100M Ethernet Switch with USB-C Power Input

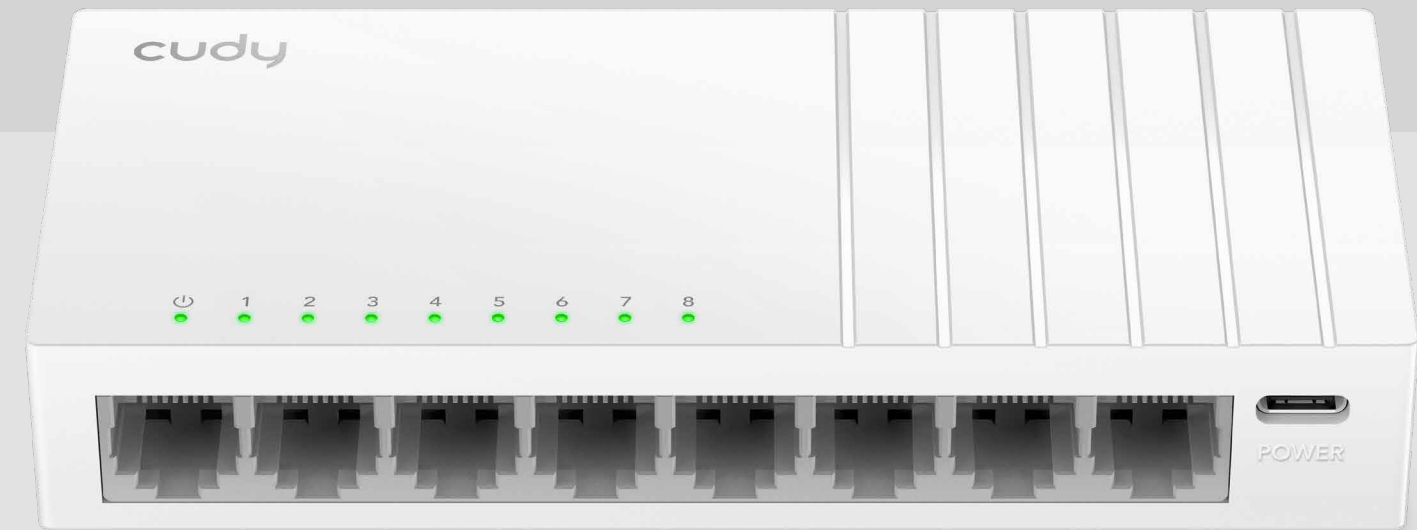

Highlights

A super-power efficient Ethernet switch powered by USB-C, ideal for sharing a wired network on a desktop, wall, or in a distribution box.

- Powering via USB-C, USB-A to USB-C Cable Included
- 8x 10/100M Ethernet Ports
- Power Efficient, Max 0.75W, Idle 0.4W
- Desktop, Wall-Mount
- 138x61.5x24 mm (5.43x2.42x0.94")
- 77 g (2.71 oz.)

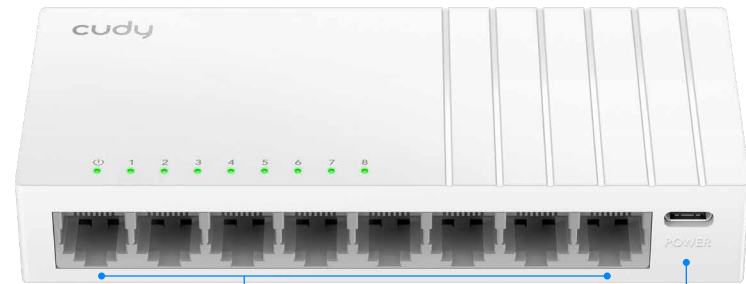



8x 10/100M Ethernet Ports

Powering via USB-C

Package Content

- FS108D
- USB-A to USB-C Power Cable
- Installation Guide

Plug and Play. Expand Network Easily.

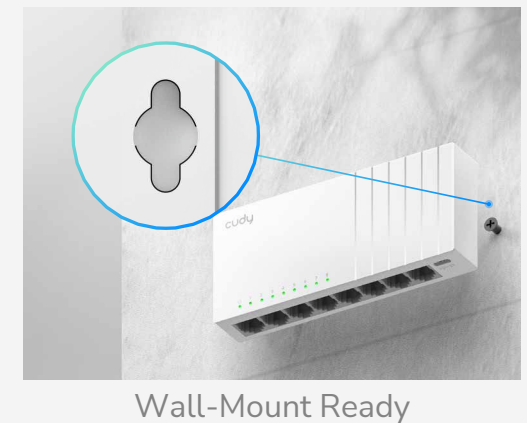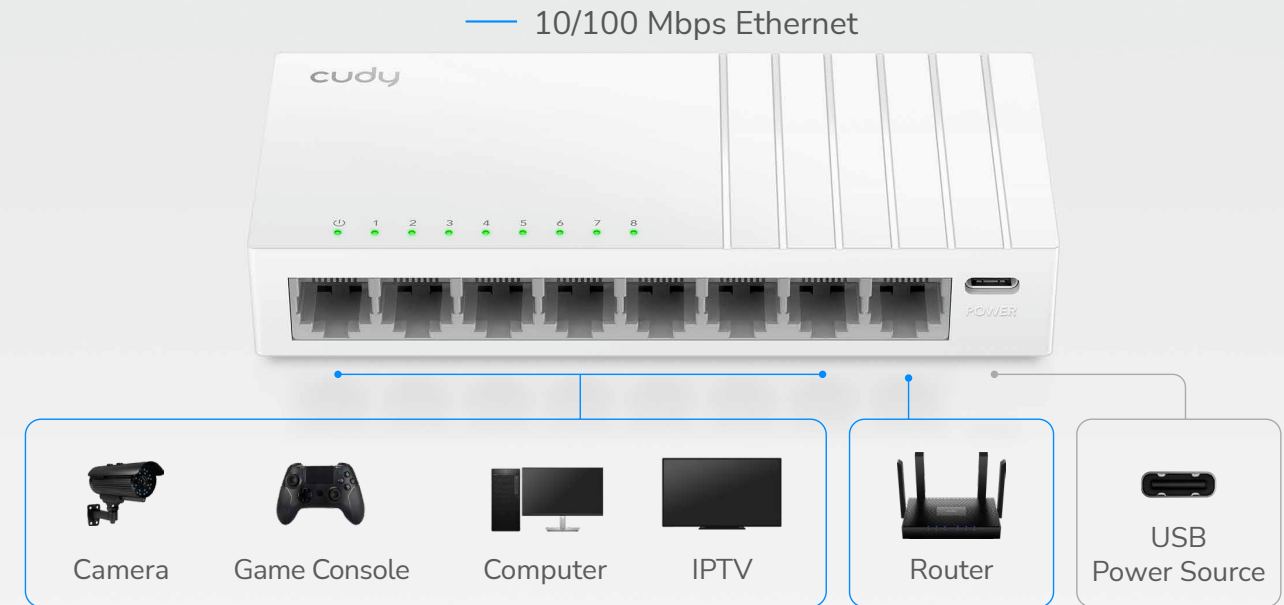



Specifications

| | | |
|-------------|---------------------------|---|
| CPU | Chipset | High-Efficiency Chipset |
| Interfaces | 10/100 Mbps RJ45 Ports | 8 |
| | LED | Power Link/ACT of Each Ethernet Port |
| | Power Input | USB-C Port |
| Performance | Copper Speed and Distance | Cat. 3 or higher cable: 100 meters at 10 Mbps Cat. 5 or higher cable: 100 meters at 100 Mbps |
| | MAC Address Table | 2048 |
| | Max Switching Capacity | 1.6 Gbps |
| | Max Forwarding Rate | 1.1904 Mpps |
| | Packet Buffer | 570 Kbit |
| Power | Power Methods | DC via USB-C Input |
| | DC | 5V 0.15A |
| | Max Power Consumption | 0.75W |
| | Idle Power Consumption | 0.4W |
| Switching | 802.3 Protocols | 802.3i 10BASE-T 802.3u 100BASE-TX |

Specifications

| | | |
|-------------|-----------------|--|
| Reliability | Environment | Operating Temperature: 0 °C ~ 40 °C (32 °F ~104 °F) |
| | | Storage Temperature: -40 °C ~ 75 °C (-40 °F ~ 167 °F) |
| | | Operating Humidity: 10% ~ 90% non-condensing |
| Mechanical | Dimension | Storage Humidity: 5% ~ 90% non-condensing |
| | | 138×61.5×24 mm 5.43×2.42×0.94 inches |
| | Product Weight | 77 g (2.71 oz.) |
| | Casing Material | Plastic |
| | Installation | Desktop Wall-mount |