

Specifications

Model	HS105
Power Input	12V / 1 A
Max Power Consumption	11 W
Ethernet	5 × 2.5 Gbps RJ45 Ports
Switching Capacity	25 Gbps
Throughput	18.66 Mpps
MAC Address Table	8 K
Jumbo Frame	15 KB
Transfer Mode	Store and forward
MTBF	100000 hour
Working Temperature	0~40°C
Storage Temperature	-40~75°C
Working Humidity	0%~100%, non-condensing
Storage Humidity	10%~95%, non-condensin
Product Size	119x85x28mm

FCC Statements:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

EU declaration of conformity

Cudy hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/30/EU, 2014/35/EU, 2009/125/EC and 2011/65/EU. The original EU declaration of conformity may be found at <http://www.cudy.com/>

Support

For technical support, the user guide and more information, please visit:
<http://www.cudy.com/support>
support@cudy.com



cudy

Quick Installation Guide

NEED TECH HELP?



Website:
www.cudy.com



Email:
support@cudy.com




Driver & Manual:
www.cudy.com/download

Support


For technical support, the user guide and more information, please visit:
<https://www.cudy.com/support>

810600214

Connection

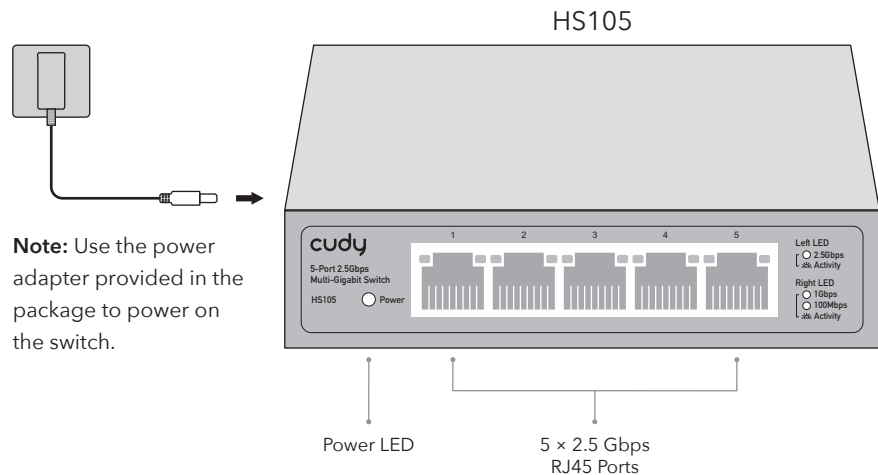

Note: Use the power adapter provided in the package to power on the switch.

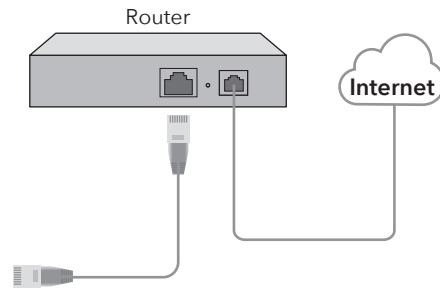

LED

Name	Indication
Power	On: Power on Off: No Power
Left LED Green (2.5 Gbps Rate)	Steady on: Connected Flashing: Connected, with active data transmission
Right LED Green (1 Gbps Rate)	Steady on: Connected Flashing: Connected, with active data transmission
Right LED Yellow (100 Mbps Rate)	Steady on: Connected Flashing: Connected, with active data transmission