

## 4 Specifications

Model	POE300
Output Voltage	53VDC
PoE Power	30W&60W max
Standard	802.3af/at/bt
Pin Polarity	1/2(-)3/6(+),4/5(+),7/8(-)
Data Rates	10/100/1000Mbps
Input Power Requirements	AC Input Voltage: 100 to 240 VAC
	AC Input Current: 0.5A 100-240 VAC
	AC Frequency: 50 to 60 Hz
Dimensions	168mm x 73.5mm x 44mm

Indicators	System Indicator: AC Power
	User Indicator: Channel Power
Connectors	Shielded RJ-45, EIA 568A and 568B
Protection	Over current protection
	Over load protection
	Over voltage protection
	Anti-interference protection
Environmental Conditions	Operating Temperature: 0 to 40°C
	Operating Humidity:Maximum 85%
	Storage Temperature:-40 to 60°C

## CE Mark Warning

This is a class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

## EU declaration of conformity

Cudy hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/30/EU, 2014/35/EU, 2009/125/EC and 2011/65/EU. The original EU declaration of conformity may be found at <http://www.cudy.com/>


For support and warranty, please visit: <http://www.cudy.com/>. Specifications are subject to change without notice. Cudy is a registered trademark of Shenzhen Cudy Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright©2020 Shenzhen Cudy Technology Co., Ltd. All rights reserved. EU Address: Otto esser 2c, 65451 Kelsterbach, Germany




## Quick Installation Guide

Model: POE300

## 1 Hardware Connection

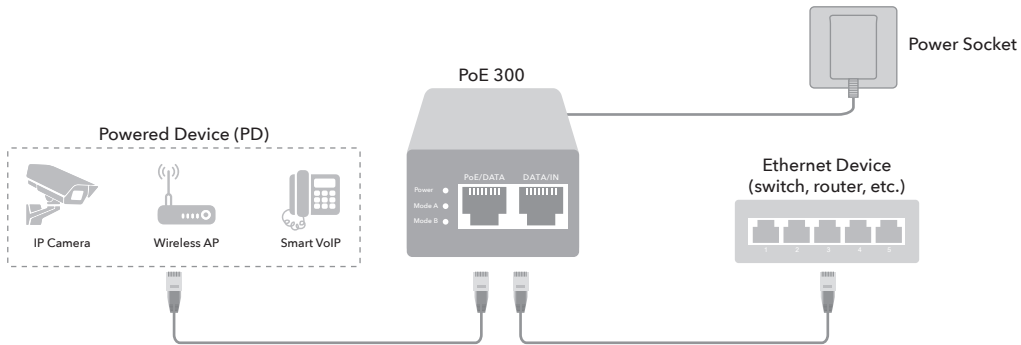

## 2 Physical Appearance



## 3 LED and Interface Explanation

<b>Data/PoE</b>	PoE injector got 100-240V power input
<b>Mode A</b>	1/2(-)3/6(+) Power output
<b>Mode B</b>	4/5(+)/7/8(-) Power output
<b>AC Socket</b>	Connect with AC cable
<b>PoE/DATA</b>	Connect to the camera with UTP cable CAT5E or CAT6 supply power
<b>DATA/IN</b>	Connect to the Ethernet device with CAT5E or CAT6 UTP cable to transmit data.