



Model: UH40A

4-Port USB 3.0 Hub




[Datasheet](#)



Highlights

Plug-and-Play USB 3.0 / 3.2 Gen 1 dongle. The backplane speed is 5 Gbps.

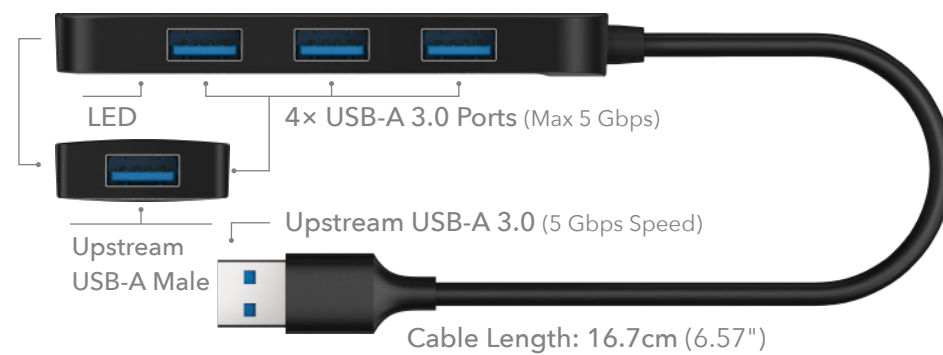

- 1 × 5 Gbps Upstream USB-A Male
- 4 × 5 Gbps USB-A 3.2 Gen 1
- Universal Compatibility
- 34 g (1.2 oz.)

Hardware Features

Interfaces	Upstream Port	1 × USB-A 3.2 Gen 1 Port (5 Gbps)
	USB Ports	4 × USB-A 3.2 Gen 1 Ports (5 Gbps)
Power	Max Power Consumption (W)	Depending on the connected devices
Physical	Color	Black Color
	Casing	ABS
Requirements	Hardware Requirement	Requires a USB-A 3.2 Gen 1 on the host device for full speed
	Compatible OS	Windows
		macOS
		Ubuntu or other Linux releases
Driver Installation	Driver Free	
Reliability	Environment	Operating Temperature: 0~40 °C (-32~104 °F)
		Storage Temperature: -20~70 °C (-10~158 °F)
		Operating Humidity: 20~85% RH non-condensing
		Storage Humidity: 10~90% RH non-condensing
Mechanical	Product Weight	34 g (1.2 oz.)
	Dimension	Main Part :
		96×31×11 mm
		3.78×1.22×0.43 inches
		Cable:
167mm		
6.57 inches		