






Model: LT700 Outdoor

Outdoor 4G LTE

Cat. 6 AC1200 Wi-Fi Router

-  4G LTE FDD&TDD Cat 6
-  IP65 Outdoor Waterproof
-  Detachable 4G Antennas
-  VPN Server&Client



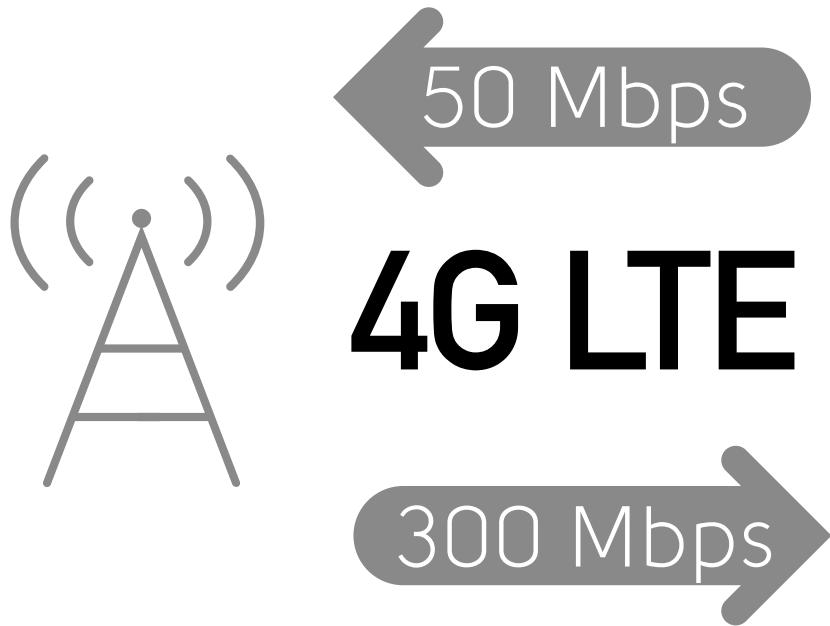

867 Mbps
5 GHz

300 Mbps
2.4 GHz



Blazing-Fast 4G LTE Advaced Pro

With Carrier Aggregation and MIMO technologies, LT700 Outdoor is capable of up to 300 Mbps in download and 50 Mbps in upload. It also allows you to connect via Wi-Fi with a maximum speed of 867 Mbps on 5 GHz and 300 Mbps on 2.4 GHz to enjoy streaming, surveillance, and much more.

Get Wi-Fi Where You Need It

Tested in the field for years to ensure universal compatibility and deliver a smooth connection. Simply plug in a SIM card and power on this elegant piece of technology to enjoy fast and stable Wi-Fi, whether you're at home or working remotely.



Specifications

- 4G LTE Cat. 6 Up to 300 Mbps Download
- AC1200 Dual-Band Wi-Fi
- 1× Gigabit Ethernet Port
- 2× Detachable Cellular Antennas
- Nano SIM Card Slot
- VPN Server and Client
- IP65 Water/Dust-Proof
- Operation Temperatures -20/60 °C

Hardware

| | |
|---------------|---|
| CPU | Mediatek Dual Core 880 MHz |
| 4G | EG060W-EA |
| DRAM | 128 MB (1 Gbit) DDR3 |
| Flash | 16 MB (128 Mbit) |
| Ethernet | 1× Gigabit LAN/WAN Port (Support 802.3at/af PoE and Passive PoE) |
| SIM card slot | 1× Nano SIM Slots |
| Button | 1× Reset Button |
| Antennas | 2× Internal WiFi Antennas 2× Detachable Cellular Antennas |
| LED | System / Internet / Ethernet / 2.4G Wi-Fi /5G Wi-Fi / Signal Strength |

Data Speed

| | |
|-------------------------|--|
| Wi-Fi | 2.4 GHz (802.11n/g/b, MIMO 300Mbps) |
| | 5 GHz (802.11ac/n/a, MIMO 867Mbps) |
| Cellular | FDD: Max 300 Mbps (DL)/ 50 Mbps (UL) |
| | TDD: Max 220 Mbps (DL)/ 30 Mbps (UL) |
| | DC-HSDPA: Max 42 Mbps |
| | HSDPA: Max 21 Mbps (DL) / Max 5.76 Mbps (UL) |
| WCDMA: 384 Kbps (DL/UL) | |

Mobile Frequency Band

| | |
|---------------|---|
| LTE Category | Cat. 6 |
| Bands | LTE-FDD: B1/ 3/ 5/ 7/ 8/ 20/ 28/ 32; |
| | LTE-TDD: B38/B40/B41; |
| | 2 × CA: B1+B1/3/5/7/8/20/28; B3+B3/5/7/8/20/28; |
| | B7+B5/7/8/20/28; B20 + B32; B38+B38; B40+B40; B41+B41 |
| WCDMA: B1/5/8 | |



Software

| | |
|----------------------------|--|
| DHCP | Server, Client List, Address Reservation |
| NAT | Port Forwarding, Port Triggering, UPnP, DMZ |
| Firewall | Mac Filter, IP Filter, Domain Filter |
| Management | Parental Control, Guest Network, Access Control, Local Management, Remote Management, Wake on LAN |
| DDNS | Compatible with 15 more DDNS providers |
| VPN Sever & Client | PPTP/L2TP/OpenVPN/WireGuard/IPSec/Zerotier |
| DNS over TLS | Cloudflare/Google/Quad9 |
| Schedule | Schedule Reboot /Wi-Fi Schedule |
| Internet Protocol version | IPv4/IPv6 |
| IPv6 | Relay Dynamic(SLAAC/DHCPv6) Static (Fixed IP) Passthrough MAP-E (Dual-stack) DS-Lite (Dual-stack) |
| Quality of Service (QoS) | Support |
| SMS | Send/Receive/Data-Usage Notification |
| TTL configuration | Support |
| Band Selection (Band Lock) | Support |
| CWMP Protocol | TR069 / TR098 / TR111 / TR181 |

Other

| | |
|---------------------|---|
| Physical | Product Dimension: Router Body: 240×100×53.7 mm (9.5×3.9×2.1 inches); 4G Antennas: 197.5×21.6×15.5 mm (7.8×0.9×0.6 inches) |
| Waterproof | IP65 |
| Environmental | Operation Temperature: -20°C to 60°C (-4°F to 140°F) Storage Temperature: -40°C to 70°C (-40°F to 158°F) |
| Package Contents | 4G LTE WiFi Router Power Adapter RJ45 Ethernet Cable Quick Installation Guide |
| System Requirements | Systems with wireless or wired network connectivity Web browser, such as Edge, Firefox, Chrome, or Safari Internet access subscription with ISP or Carriers |